

GROUND STACK KIT



FEATURES

- Complete ground support solution for stacking video wall on the floor
- Works for walls between 4.92 ft (1.5 m) and 6.56 ft (2 m) wide and as high as 9.85 ft (3 m) tall; combine additional Ground Stack Kits to achieve wider walls
- Stack multiple kits to build wider video walls
- Support for flat and concave video walls, including 5° and 10° curves
- Designed to work with the REM1, REM3IP, F2, F3/F3X, F4IP/F4XIP, and F5IP video panels
- Ships in road case for easy setup and pack after the gig
- Dual function rig bars required for operation; compatible with F-series and REM Video Panels from Chauvet Professional (not included with Ground Stack Kits)
- Climbable system includes platform to assist with rigging taller walls

SPECIFICATIONS

CONSTRUCTION/PHYSICAL

- Dimensions (packed in case): 50.4 x 21.1 x 39.3 in (128 x 53.5 x 99.9 cm)
- Weight (total with case): 332 lb (150.6 kg)
- Weight (ground support without case): 175 lb (79.4 kg)
- Weight (empty case): 157 lb (71 kg)
- Exterior Color: Black
- Housing Material: Aluminum extrusion and Steel
- Maximum vertical stack supported: 3 m tall
- Maximum width supported: 2.0 m wide
- Maximum person weight supported: 250 lb (113.4 kg)
- Ballast needed per 1 m height stack (minimum): 150 lb (68 kg)
- Ballast needed per 2 m height stack (minimum): 200 lb (90.7 kg)
- Ballast needed per 3 m height stack (minimum): 275 lb (124.7 kg)

GROUND STACK KIT

CERTIFICATIONS/QUALIFICATIONS


- CE
- IP Rating: IP65 (temporary outdoor use)
- Wind Rating: consult structural engineer for proper ballast weight and reinforcement
- Temperature (Ambient): -4 °F to 140 °F (-20 °C to 60 °C)

WHAT'S INCLUDED


- 1pc: Customized road case (unit ships prepacked)
- 2pcs: Floor Bar
- 6pcs: PAM
- 5pcs: Ladder pipe with clamp
- 4pcs: 0.5 m Truss
- 4pcs: 1 m Truss
- 8pcs: TR16 screw jack
- 1pc: Climbing Platform
- 13pcs: M12 F-series cabinet screws
- 6pcs: REM Bracket
- 13pcs: truss double sided connector AL6063
- 25pcs: Truss pins with clip
- 1pc: 6" bubble level

REQUIRED ACCESSORIES

- REM or F-series Dual Function Rig Bar

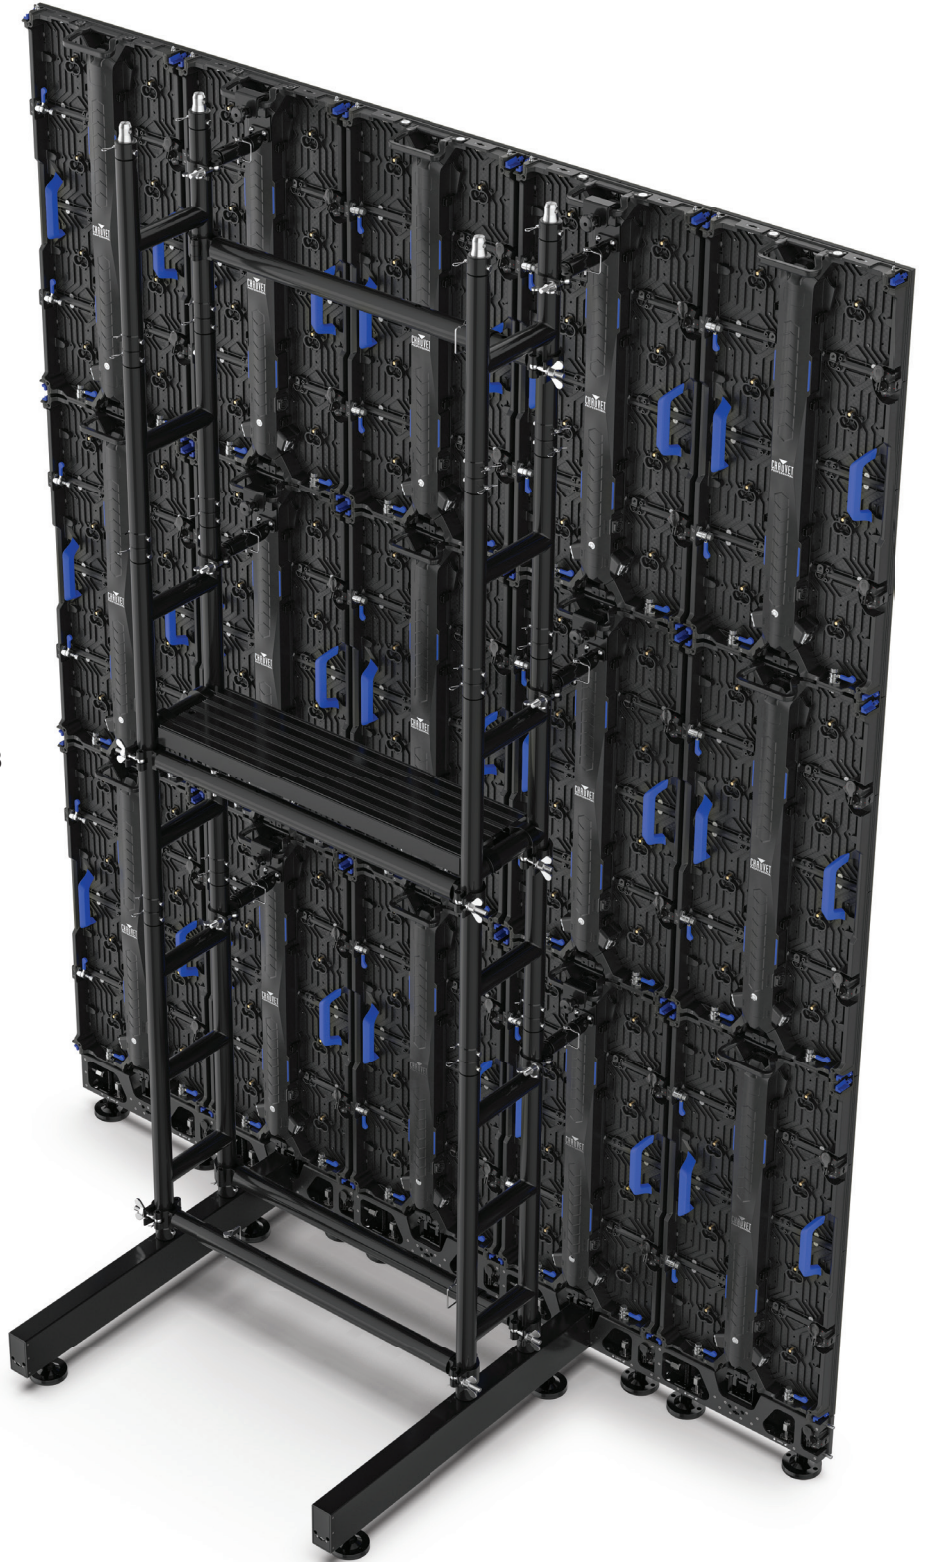

GROUND STACK KIT

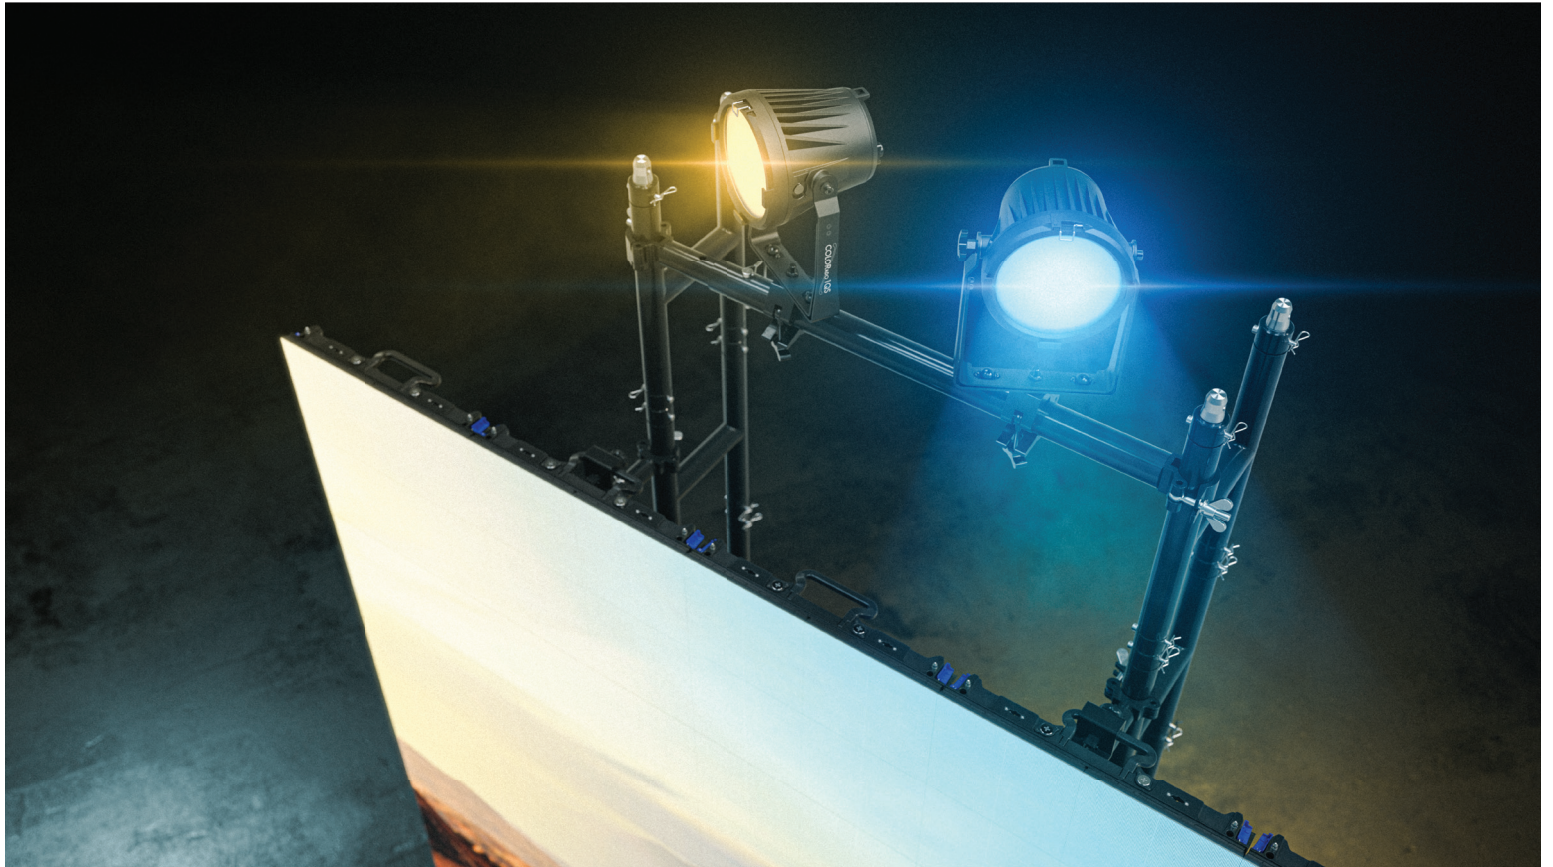

Mount lighting fixtures directly to the Ground Stack Kit for on stage back lighting using standard stage rigging clamps (2inch, 50mm).

GROUND STACK KIT

